


MEU

High Speed Steel
HOLE MILLS UNGUIDED - TYPE 'A'

Specifications conform
to IS 5989 - 1971

Dimensions in mm

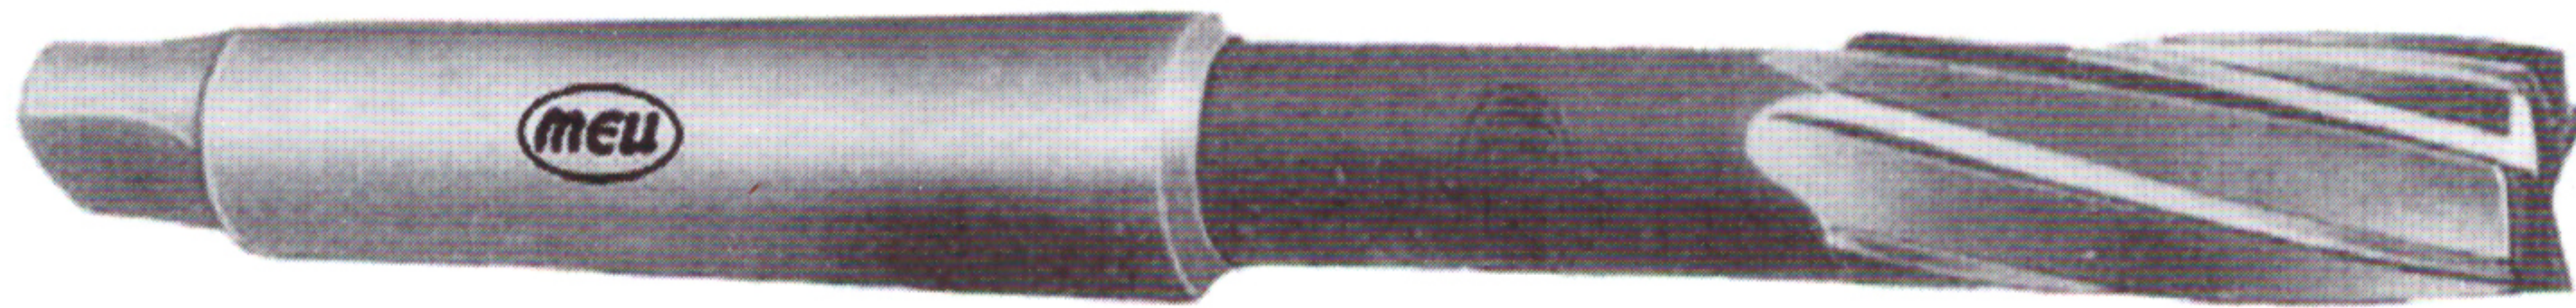

A tool having teeth on the periphery and end face
integral with a Morse Taper Shank for holding and driving

Nominal Diameter h6	Cutting Edge Length	Overall Length	Morse Taper No.
5.9	25	110	1
7.9	25	120	1
9.9	30	125	1
11.8	35	140	1
12.8	35	140	1
13.8	35	160	1
14.8	35	160	1
15.8	40	160	2
17.8	45	180	2
19.8	45	180	2
21.8	45	200	2
23.8	55	200	3
24.8	55	200	3
25.8	60	200	3
26.8	60	220	3
27.8	60	220	3
29.8	60	220	3
31.8	60	220	3
33.8	60	250	4
34.8	60	250	4
35.8	60	250	4
37.8	60	250	4
39.8	60	250	4
41.8	60	250	4
44.8	60	250	4
46.8	60	280	4
47.8	60	280	4
49.8	60	280	4