



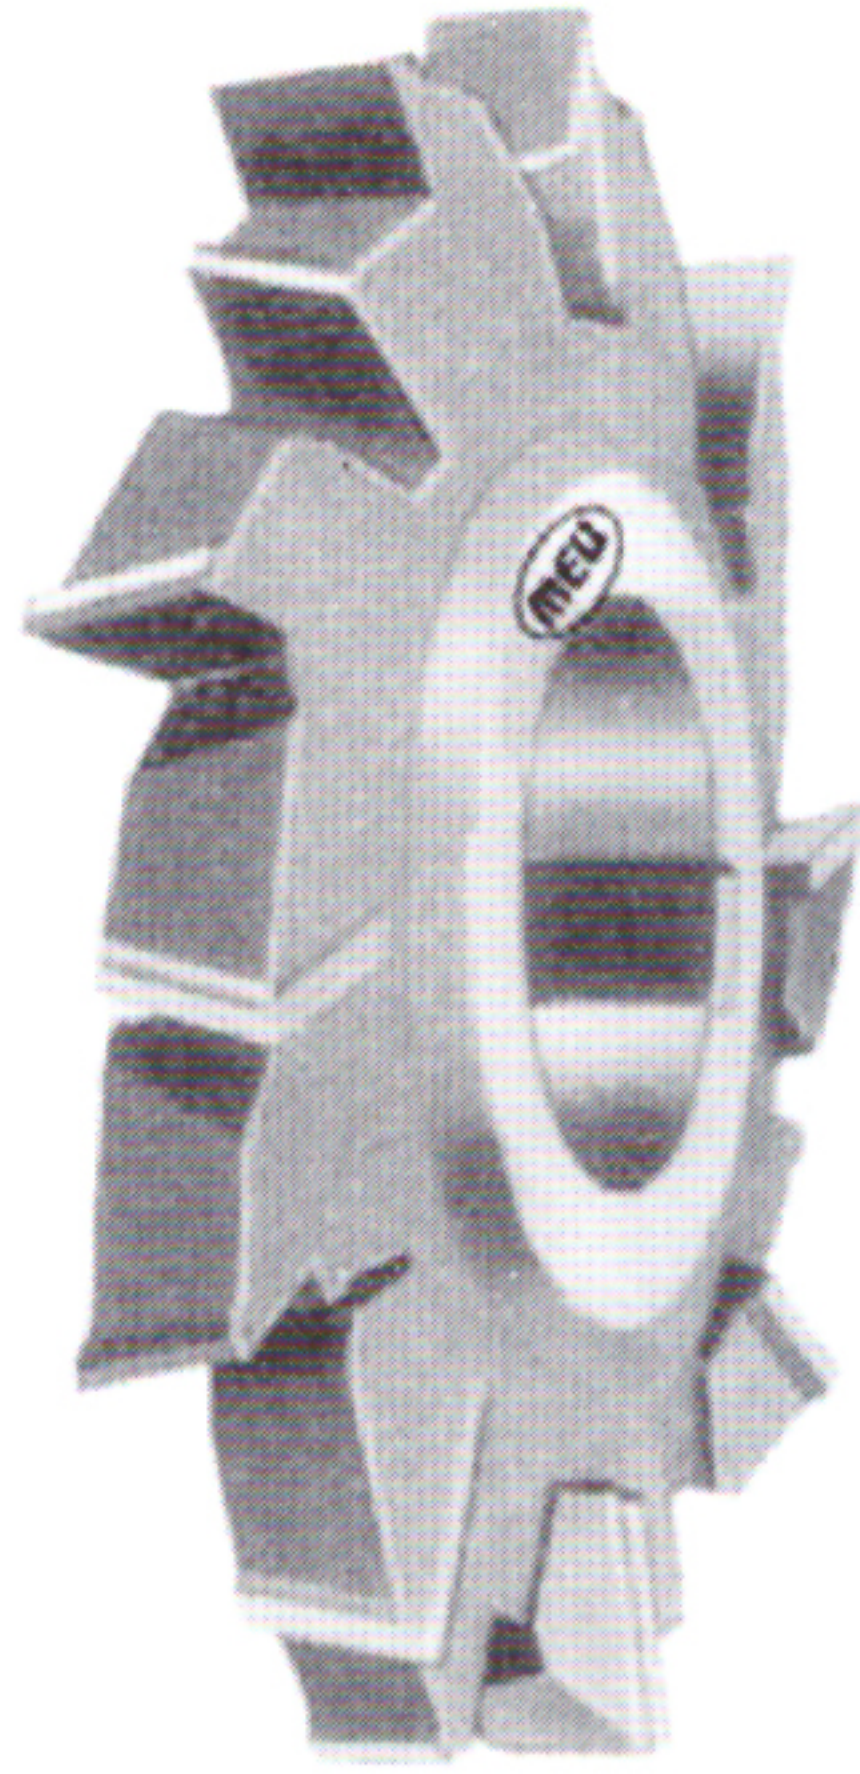

High Speed Steel
**STAGGERED TOOTH SIDE AND FACE
 CUTTERS**

Specifications conform
 to BS 122/Part 1-1953

Dimensions in inches

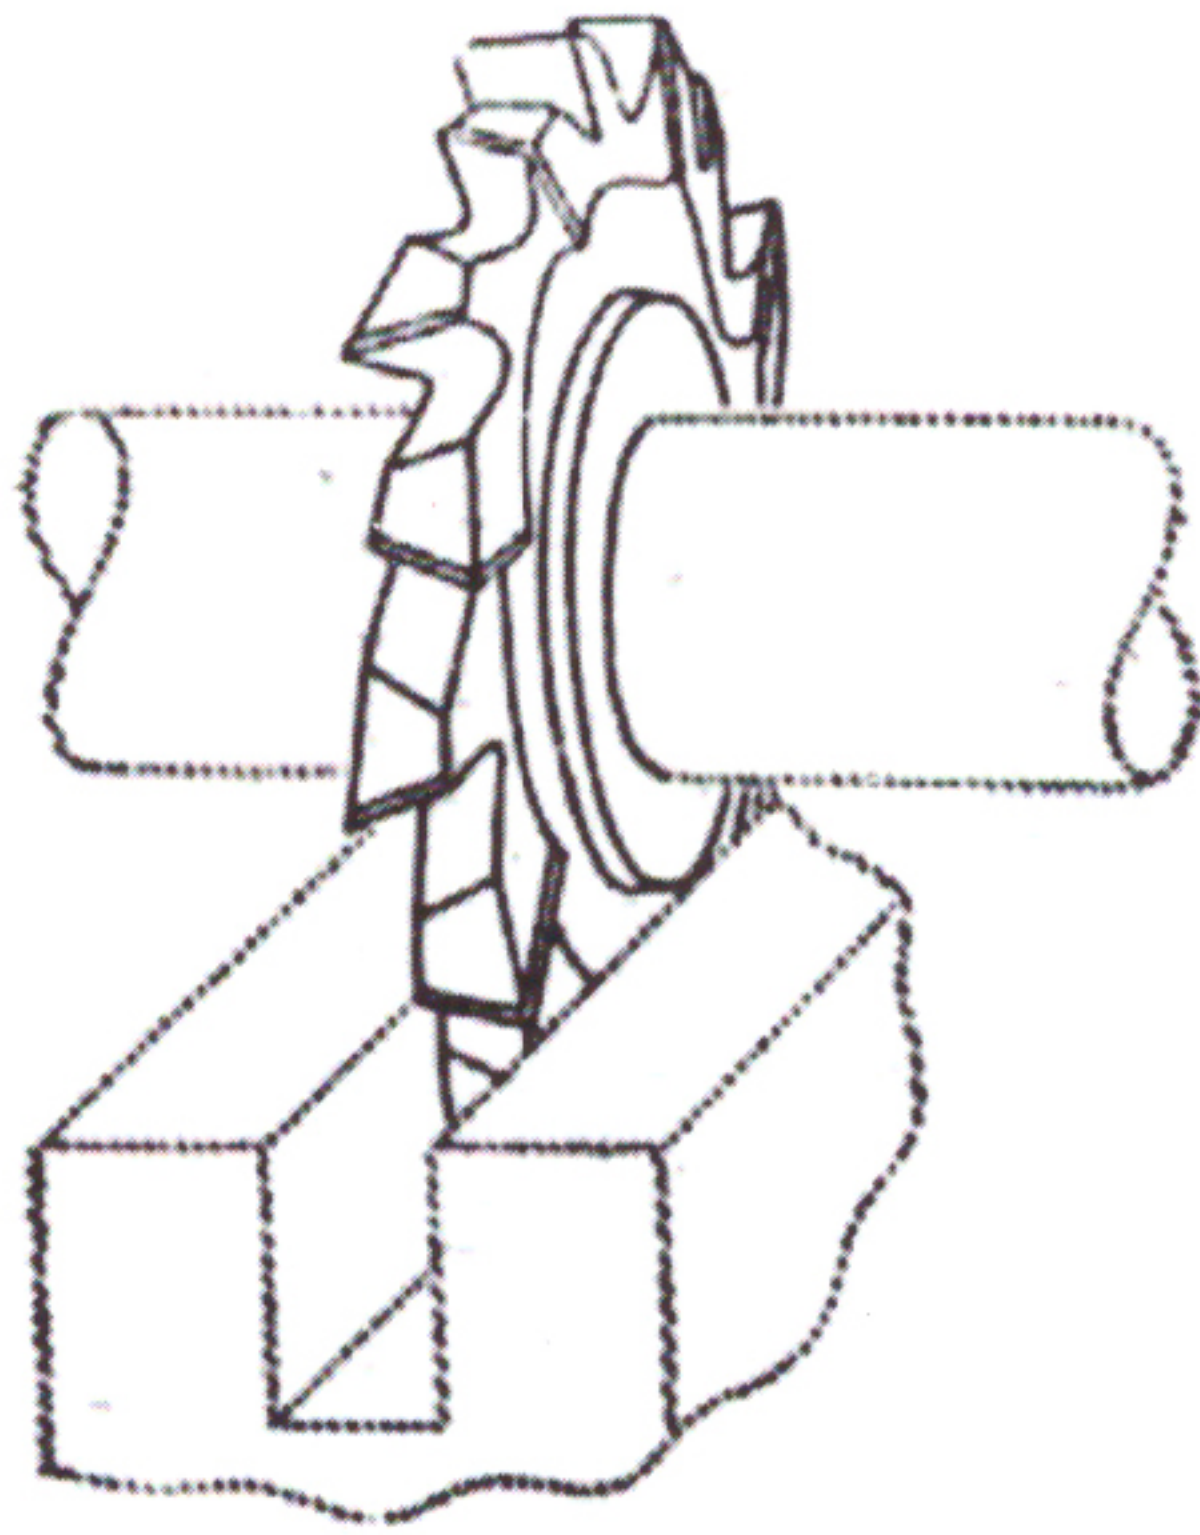

A Cutter with teeth on the periphery and on both sides. The teeth are alternately right-hand and left-hand angled and have a positive rake. Alternate side teeth are removed.

Diameter + 0.045" - 0.000"	Bore + 0.00075" + 0.00025"	Width + 0.005" - 0.000"
3	1	1/4
		5/16
		3/8
		1/2
4	1	1/4
		5/16
		3/8
		1/2
		5/8
5	1.1/4	3/8
		1/2
		5/8

Diameter + 0.045" - 0.000"	Bore + 0.00075" + 0.00025"	Width + 0.005" - 0.000"
6	1.1/4	3/8
		1/2
		5/8
		3/4
7	1.1/2	1/2
		5/8
		3/4 7/8
8	1.1/2	5/8
		3/4
		7/8 1